


# The P 15 series: The ultra-durable filter mats Filter classes G 2 - G 4

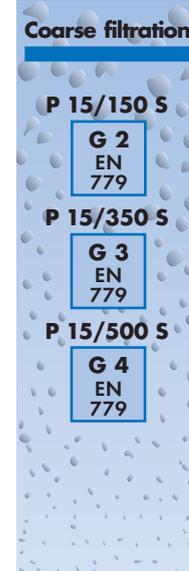

**viledon®**

## The application

The P 15 series comprises the following familiar and yet continually enhanced Viledon filter mats:

- ▶ P 15/150 S
- ▶ P 15/350 S
- ▶ P 15/500 S

All the types in this series are tough, high performance products, suitable for filtration in all kinds of ventilation systems.

## The media and their characteristic features

▶ The mats are made of high performance nonwovens produced inhouse from elastic, break-resistant polyolefine fibers with thermal bonding.

▶ P 15/350 S and P 15/500 S are progressive in structure, with layers being arranged behind each other so as to ensure that the density of the fiber layers increases towards the clean air side. This optimizes the defined filter performance and the dust holding capacity, resulting in longer useful lifetime for the filter concerned.

▶ **Fire behaviour:** Viledon filter media satisfy the stringent requirements of Fire Class F1 according to DIN 53 438 and are thus self-extinguishing.

▶ **Certified quality:** P 15 filter mats have been tested according to EN 779 and are manufactured under our certified quality management system to ISO 9001. This offers all users the reassuring certainty that all filters will be supplied in consistently high standardized quality, documented by marking the filter mat with brand name, type designation and filter class.

		P 15/150 S	P 15/350 S	P 15/500 S
▶ Weight, approx.	g/m <sup>2</sup>	100	200	350
▶ Thickness, approx.	mm	8	14	20
▶ Thermal stability	°C	up to 100	up to 100	up to 100
▶ Moisture resistance, rel. humidity	%	up to 100	up to 100	up to 100
▶ Supplied as rolls, useful width/length	mm/m	2000/40	2000/30	2000/20
▶ Supplied as cut pieces	mm	Pieces cut to customer's specification		

## The special features of the P 15 series

▶ High arrestance throughout their entire useful lifetime, thus providing maximized operational reliability.

▶ The high mechanical strength of the material used offers good dimensional stability throughout the operational lifetime, even when handling large air volumes, thus ensuring dependable operation of the filter system concerned.



▶ Thanks to the polyolefine fibers used in the medium, P 15 filter mats are widely resistant to chemicals like solvents, acids and alkalis. They must be protected against continuous UV radiation.

▶ The filter mats are cleanable by careful washing, beating or spraying. Even after washing, the filter mats remain dimensionally stable, thus retaining their technical filtering properties.

Our environment-friendly filter series for users interested in avoiding waste and cutting their filter costs.

**Freudenberg**

# Technical filter test data in accordance with EN 779

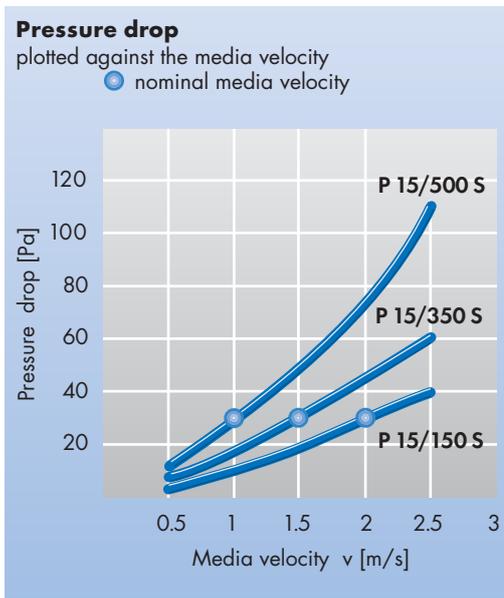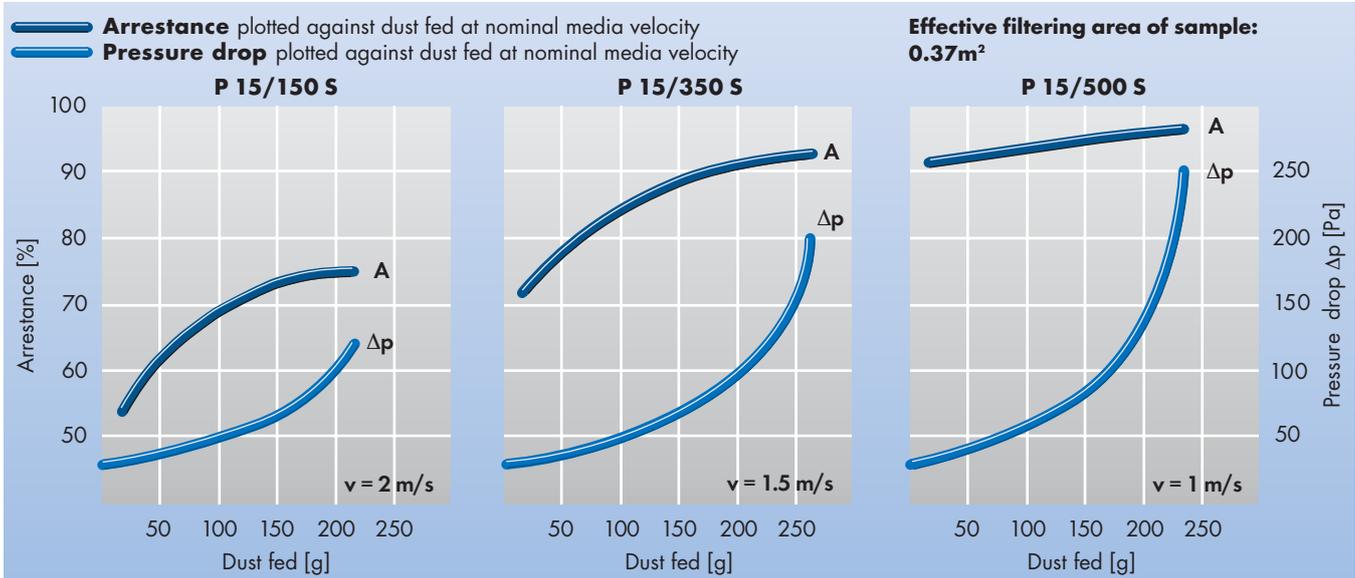

			<b>P 15/150 S</b>	<b>P 15/350 S</b>	<b>P 15/500 S</b>
▶ Average arrestance	$A_a$	%	75	85	94
▶ Initial efficiency	$E_i$	%	< 20	< 20	< 20
▶ Nominal media velocity	●	m/s	2	1.5	1
▶ Initial pressure drop	$P_a$	Pa	30	30	30
▶ Final pressure drop*	$P_a$	Pa	250	250	250
▶ Dust holding capacity		g/m <sup>2</sup>	600	600	600

\* For cost-efficiency or system-specific reasons it may be appropriate to change the filters before reaching the stated final pressure drop.

The figures given are mean values subject to tolerances due to the normal production fluctuations. Our explicit written confirmation is always required for the correctness and applicability of the information involved in any particular case.

You will find instructions on how to handle and dispose of loaded filters in our information on product safety and eco-compatibility.

Subject to technical alterations.

## Freudenberg Filtration Technologies KG

69465 Weinheim / Germany

Tel. +49 (0) 6201/80-6264 | Fax +49 (0) 6201/88-6299

viledon@freudenberg-filter.com | www.viledon-filter.com

